

Category 5e Patch Panel

ConnectMedia Category 5e Patch Panels exceed TIA and ISO requirements for Category 5e performance and complies with all of the performance requirements for current applications such as Gigabit Ethernet 10/100BASE-Tx, Token Ring 155 Mbps ATM, 100 Mbps TP-PMD, ISDN and digital video and analog and digital voice (VoIP).



ConnectMedia Patch panels feature universal wiring blocks which permit field installation to either T568A or T568B wiring. Punchdown blocks are suitable for both standard 110 and Krone-style single wire tools. Available in 16, 24 and 32 port versions and comes standard with cage nuts.


- ➔ TIA & ISO Compliant
- ➔ T568A & T568B wiring
- ➔ Use 110 or Krone-style tool to terminate
- ➔ Choice of labelling systems



TECHNICAL INFORMATION

Transmission Performance (-dB) @100Mhz	CAT5e Standard
NEXT	>=43.0
ELFEXT	>=35.1
Return Loss	>=20.0

Mechanical Characteristics	
Durability	>750 insertions/extractions
RJ45 pin connector	Meets FC part 68, sub part F and IEC-603-7 compliant
Contact material	Phosphor Bronze, 50u inches Gold over 100u inches Nickel
IDC Contact	Accepts 0.64mm-0.40mm (AWG 22-26)

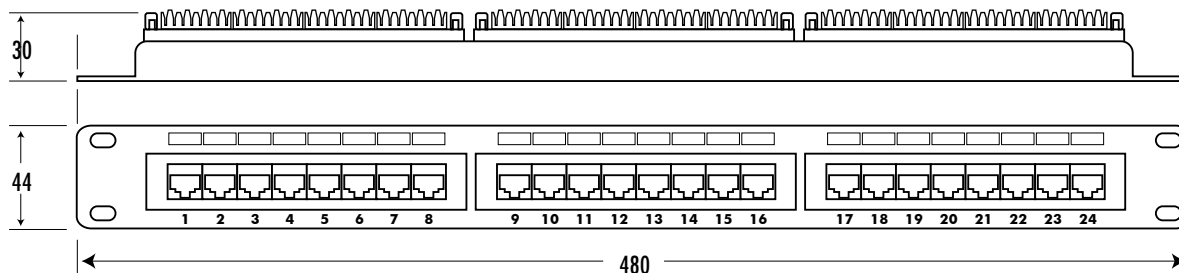

ORDERING INFORMATION

C5EP16-P CAT5e Patch Panel - 16 Port

C5EP16-PP24 CAT5e Patch Panel - 24 Port

C5EP32-P CAT5e Patch Panel - 32 Port