

Category 6 Jack

ConnectMedia Category 6 Jacks exceed TIA and ISO requirements for Category 6 performance and comply with all of the performance requirements for current applications such as ATM 155/622 MBPS, Ethernet 10BASE-T, 100BASE-T, 100BASE-TX, 1000BASE-T Gigabit Ethernet, 4/16 Mb/s Token Ring or Broadband Video, and future applications designed for Category 6 cabling systems.

The ConnectMedia Category 6 Jacks feature universal wiring blocks which permit field installation to either T568A or T568B wiring. Punchdown blocks are suitable for both standard 110 and Krone style single wire tools.

The ConnectMedia Category 6 Jacks come standard with 180 degree punchdown blocks for improved bend radius space saving in workstations and ease of termination in unloaded patch panels.

The ConnectMedia Category 6 Jacks are suitable for Australian style face plates removing the need for the use of time consuming adaptors




- ➔ TIA & ISO Compliant
- ➔ T568A & T568B wiring
- ➔ Use 110 or Krone-style tool to terminate
- ➔ 180 degree termination



TECHNICAL INFORMATION

Transmission Performance (-dB) @250Mhz	CAT6 Standard	Mechanical Characteristics
NEXT	48.1	Durability
ELFEXT	37.2	>750 insertions/extractions
Return Loss	19.3	RJ45 pin connector
		Meets FC part 68, sub part F and IEC-603-7 compliant
		Contact material
		Phosphor Bronze, 50u inches Gold over 100u inches Nickel
		IDC Contact
		Accepts 0.64mm-0.51mm (AWG 22-24)

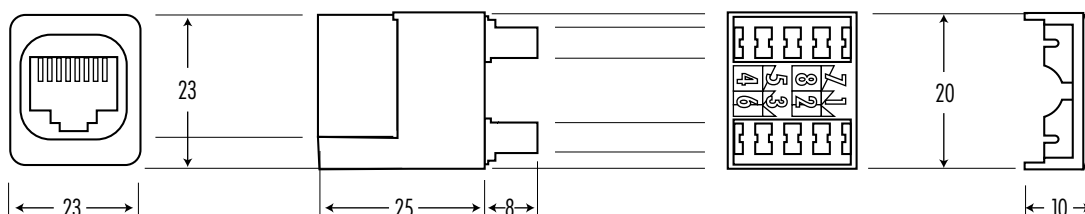

ORDERING INFORMATION

C6J-WH CAT6 Jack - White JC6WH/50 CAT6 Jack - White in Bucket

25
WARRANTY

