

Category 6 Patch Panel

ConnectMedia Category 6 Patch Panels exceed TIA and ISO requirements for Category 6 performance and complies with all of the performance requirements for current applications such as ATM 155/622MBPS, Ethernet 10BASE-T, 100BASE-T, 100BASE-TX, 1000BASE-T Gigabit Ethernet, 4/16 MB/s Token Ring or Broadband Video, and future applications designed for Category 6 cabling systems.




ConnectMedia Patch Panels feature universal wiring blocks which permit field installation to either T568A or T568B wiring. Punchdown blocks are suitable for both standard 110 and Krone-style single wire tools. Available in 24 port versions and comes standard with cage nuts.

- ➔ TIA & ISO Compliant
- ➔ T568A & T568B wiring
- ➔ Use 110 or Krone-style tool to terminate
- ➔ Choice of labelling systems



TECHNICAL INFORMATION

Transmission Performance (-dB) @250Mhz		CAT6 Standard	Mechanical Characteristics	
NEXT	48.1	>=46.0	Durability	>750 insertions/extractions
ELFEXT	37.2	>=35.1	RJ45 pin connector	Meets FC part 68, sub part F and IEC-603-7 compliant
Return Loss	19.3	>=16.0	Contact material	Phosphor Bronze, 50u inches Gold over 100u inches Nickel
			IDC Contact	Accepts 0.64mm-0.40mm (AWG 22-26)

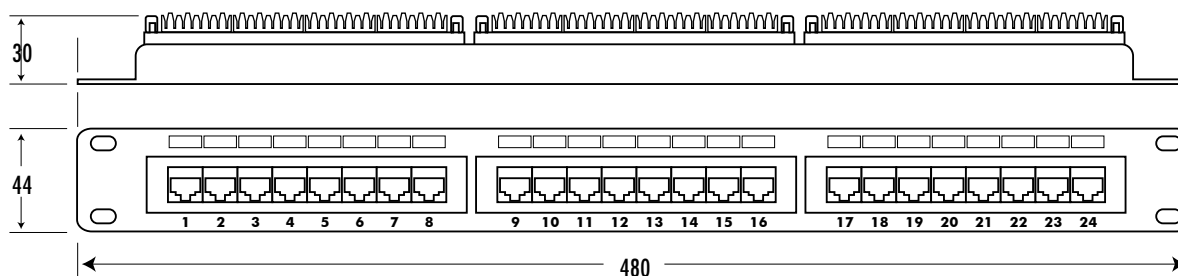

ORDERING INFORMATION

C6P24 CAT6 Patch Panel - 24 Port

www.connect-media.com.au

CONNECTMEDIA
CATEGORY 6 SOLUTIONS

25
WARRANTY

