

## Category 5e Surface Mount Outlet

ConnectMedia Category 5e Surface Mounts exceed TIA and ISO requirements for Category 5e performance and comply with all of the performance requirements for current applications such as ATM 155/622 MBPS, Ethernet 10BASE-T, 100BASE-T, 100BASE-TX, 1000BASE-T Gigabit Ethernet, 4/16 Mb/s Token Ring or Broadband Video and future applications designed for Category 5e cabling systems.

The ConnectMedia Category 5e Surface Mounts features universal wiring blocks which permit field installation to either T568A or T568B wiring. Punchdown blocks are suitable for both standard 110 and Krone style single wire tools.

The ConnectMedia Category 5e Surface Mounts comes standard with CAT5e jacks, label window, cable ties, screws and double sided tape and are available in one and two module versions that can be wired for either side or base entry of cables.

- ➔ TIA & ISO Compliant
- ➔ T568A & T568B wiring
- ➔ Single or Dual version
- ➔ Use 110 or Krone-style tool to terminate




### TECHNICAL INFORMATION


Transmission Performance (-dB)	@100Mhz	CAT5e Standard
NEXT	44.1	>=43.0
ELFEXT	42.3	>=35.1
Return Loss	34.0	>=20.0

Mechanical Characteristics	
Durability	>750 insertions/extractions
RJ45 pin connector	Meets FC part 68, sub part F and IEC-603-7 compliant
Contact material	Phosphor Bronze, 50u inches Gold over 100u inches Nickel
IDC Contact	Accepts 0.64mm-0.51mm (AWG 22-26)

Label window: 35 x 7

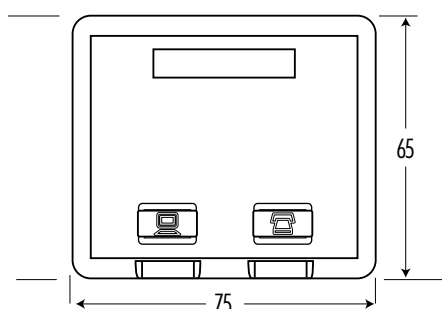

Identification Icons

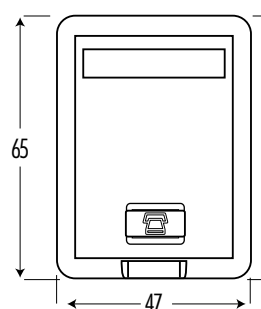

### ORDERING INFORMATION

SMC51 CAT5e Surface Mount Outlet - Single

SMC52 CAT5e Surface Mount Outlet - Double

25  
WARRANTY

