

Voice Patch Panels

The ConnectMedia Voice Patch Panel exceeds TIA/EIA-568-B.2-1 requirements and meets FCC Part 68.

The ConnectMedia 1RU 8P4C Voice Patch Panel is used to represent high density voice tie cables within 19" enclosures. The 8 position 4 contact Jack allows two rows of 25 ports within 1RU and up to 2-pair termination at the rear of the patch Panel.



The ConnectMedia Voice Patch Panels feature punchdown blocks suitable for both standard 110 and Krone-style single wire tools and comes standard with rear looming shelf for breaking out and fixing multipair telephone cable.


The panel can accommodate up to 100-pair ties using 2-pair voice services or 50-pair ties using 1-pair voice services.

- ➔ High Density 50-port 1 RU
- ➔ Use 110 or Krone-style tool to terminate
- ➔ 8P4C voice grade jacks
- ➔ Rear loom shelf
- ➔ Choice of labelling systems



TECHNICAL INFORMATION

Durability	>750 insertions/extractions	IDC method	110/Krone-style Termination
RJ pin connector	8 position, 4 contact	1 pair capacity	Up to 100 pair voice tie cable
Contact material	50um gold over nickel	2 pair capacity	Up to 50 pair voice tie cable
IDC contact	Accepts 0.64mm-0.40mm (AWG 22-26)	Port density	50 x 8P4C Jacks in 1RU

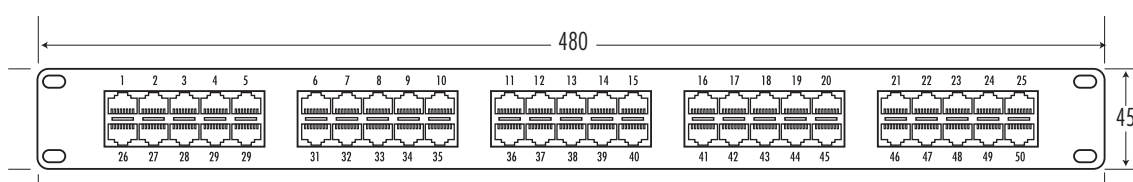

ORDERING INFORMATION

PPV50 50 Port RJ45 8P4C Patch Panel 1RU

